



Air Preparation Products

Global

Prep-Air II

Miniature

P3N

General Industrial

Stainless Steel

Precision / Proportional

Bulk Liquid Separators

## 09L General Industrial Mist Lubricators

- Metal bowl with sight gauge and manual drain – standard
- Transparent sight dome for 360° visibility
- Bowl can be filled while air line is under pressure
- Proportional oil delivery over a wide range of air flows



### Material specifications

Body Zinc alloy, die cast

### Operating information

Pressure rating: 0 to 150 PSIG (0 to 10.3 bar)

Temperature rating: 32°F to 150°F (0°C to 66°C)

Suggested lubricant: F442 oil

Petroleum based oil of 100 to 200 SSU viscosity at 100°F (38°C) and an aniline point greater than 200°F (93°C)

(DO NOT USE OILS WITH ADDITIVES, COMPOUNDED OILS CONTAINING SOLVENTS, GRAPHITE, DETERGENTS, OR SYNTHETIC OILS.)

### 09L Lubricator




Port size	Bowl type	Bowl capacity	Flow SCFM	Part number (NPT)
2"	Metal / Sight gauge	1 quart	1000	<b>09L84BA</b>
2"	Metal / Sight gauge	3 quart	1000	<b>09L8PBA</b>

\* Engineering level will be added at factory.

### Service kits

Bowl kit	Metal bowl, sight gauge / twist drain	<b>PS612P*</b>
Fill cap kit		<b>PS610P</b>
Lubricator service kit		<b>PS607P</b>
Oil	1 Quart	<b>F442001</b>
	12 Quart case	<b>F442003</b>
	4 Gallon case	<b>F442005</b>
Sight dome kit		<b>PS613P</b>

\* 1 quart bowl.

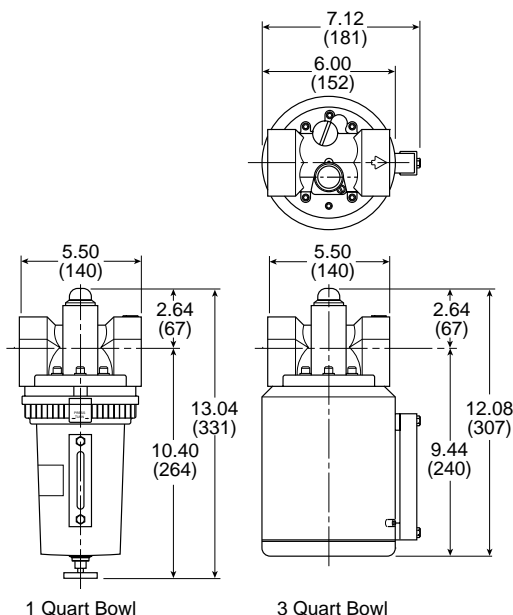

Most popular.

